



Technical Specifications	
Accuracy	0.5°
Resolution	0.1°
Working Range	000.0°~999.9°
Power Supply	CR2032 3V Lithium Battery
Working Current	≤120μA
Working temperature	32°F to 122°F (0°C to 50°C)
Working Humidity	≤85%

Button Function	
ON/OFF button	Short press ON/OFF to turn on 2 in 1. Short press ON/OFF to shut off the LCD. Long press ON/OFF for more than 3 seconds to shut off the whole system.
ZERO button	Press ZERO to set zero at any point when turn on 2 in 1

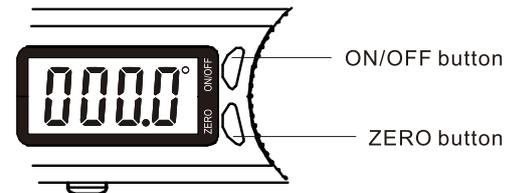


* Automatically shut off the LCD in 5 min.
Move the scale to turn on the device when at off LCD status.

Battery Installation

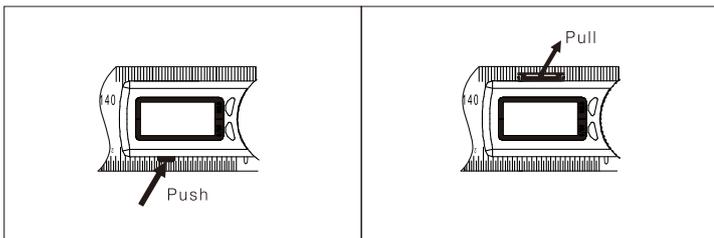

To replace battery, push the protrudent on the bottom of the LCD. The edge of battery container is shown on the upper side of the LCD


Pull the battery container out

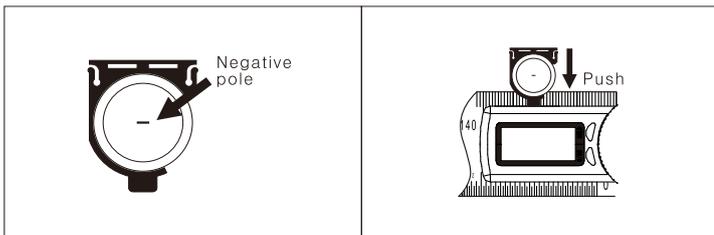

The negative pole of battery is upside, positive pole is downside.


Push the battery container back

Operation Mode

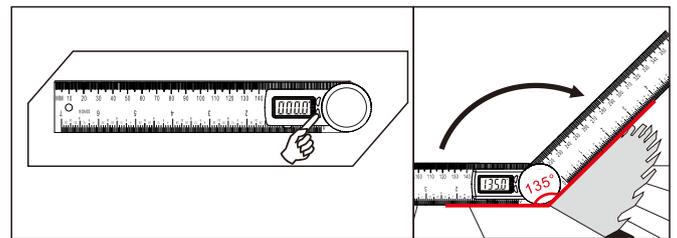

Put the tool on any surface and short Press ZERO to set zero

Rotate the ruler to measure the angle

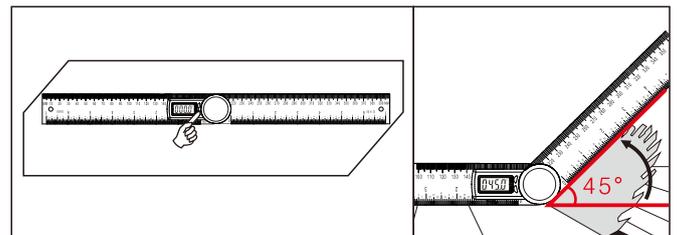

Short press ON/OFF to turn it on, put it on the flat surface as pic, make sure the both ruler's edges touch the surface, press ZERO to set zero.

Rotate the ruler to measure the angle

Trouble Shooting

Problem	Solution	Possible Cause
No display or ambiguous	Lower voltage, no battery or incorrect installation of battery	Reinstall battery or replace battery
Erratic display	Casual misfunction caused by high vibration or strongly swinging	Zero setting
Number skip or frozen display	Internal error	Remove battery wait 1 minute and replace

⚠ Notices:

1. Reading the instruction sheet carefully before using 2 in 1;
2. This is a sensitive precision tool. Do not disassemble it by yourselves or drop it;

😊 Hints:

1. Please notice the sharp edge, avoid scratching;
2. Store the 2 in 1 at the place which the children could not reach;
3. Do not use the 2 in 1 as toy to play or as weapon to hit people;
4. Clean the 2 in 1 with mild liquid soap and damp cloth, after it, clean it with the dry and soft cloth, never immerse in water.
5. If 2-in-1 will not be used for a long time, store it to a dry and shany place. Never leave it outside at a wet and shiny envinment. Before storing a wipe with anti-rust oil is recommended;
6. Please return the device to our factory if there is a disastrous problem;